

# **EXHIBIT H**



# Kongeriget Danmark

## PRIORITY DOCUMENT

Patent application No.: PA 1998 00910  
Date of filing: 08 July 1998  
Applicant: Novo Nordisk A/S  
Novo Allé  
DK-2880 Bagsværd

This is to certify the correctness of the following information:

The attached photocopy is a true copy of the following document:

- The specification, claims and drawings as filed with the application on the filing date indicated above.



Patent- og  
Varemærkestyrelsen  
Erhvervsministeriet

TAASTRUP 26 November 1999

A handwritten signature in cursive script.

Karin Schlichting  
Head Clerk

08/07/98 13:14 HEIDEN &amp; HOIBERG + 43508001

NR. 571 84

Modtaget PD  
- 8 JULI 1998

P 227 DK

1

The present invention relates to a medication delivery device having a cartridge assembly and a dosing assembly coupled together for delivering selected doses of medication.

5

#### Background

Some medication, such as insulin is self-administered. The typical diabetes patient will require injections of insulin several times during the day. The required insulin dose will vary from patient to patient, and will for each patient often also vary during the day. Each patient will often establish a regimen for the insulin administration adjusted to his or her insulin need as well as lifestyle. Medication delivery pens have been developed to facilitate the self-administration of medication, such as insulin.

One prior art medication delivery pen includes a pen body assembly comprising a medication cartridge and a plunger device. A needle assembly may be connected to the pen body assembly. The medication is delivered by moving or pressing a plunger in the direction of the needle assembly thereby delivering the medication. When the medication in the cartridge is exhausted the pen body assembly is discarded. Depending on the medication needs for each individual the medication in the cartridge will last for several days. During this period the needle assembly will often have to be displaced by a new assembly or new needle due to increasing bluntness of the needle making injections painful for the patient.

Due to the environmental and economical reasons medication delivery pens were developed, for which pens only a part of the pen was discarded after medication exhaustion, such as the cartridge only.

An example of prior art pens is disclosed in EP 0 688 571 wherein a medication delivery pen has a reusable pen body assembly and a disposable cartridge assembly that are threadably engageable with one another. The disposable cartridge assembly includes a plunger and can releasably receive a needle cannula assembly through a threaded coupling. A driving means in the pen body assembly engages the plunger after engagement of the pen body assembly and the cartridge assembly, whereby the pen is ready for dosing the medicine within the cartridge. The cartridge

08-07-98

Tekstans.doc

08/07/98

13:14

HEIDEN &amp; HOIBERG + 43500001

NR. 571

05

2

holder assembly can be disassembled from the pen body assembly after the medication therein has been exhausted, discarded and replaced.

5 However, a drawback of the above-mentioned pen is that the driving means of the pen body may be disengaged from the plunger of the cartridge during normal use resulting in inaccurate dosing of the medicine.

10 For the device disclosed in EP 0 688 571, the needle assembly will often have to be replaced independently of replacement of the cartridge. When releasing the needle assembly from the cartridge assembly the cartridge assembly may inadvertently be released or partly released from the pen body assembly. Thereby the driving means of the pen body may be disengaged from the plunger of the cartridge. In particular if the pen body assembly is only partly released from the cartridge assembly the user will most probably not be aware of the disengagement but will receive only a portion  
15 or even nothing of the medicine.

20 Even pens with differently pitched threaded couplings and/or threaded couplings having different diameters whereby the force exerted to fasten and/or release one coupling is greater than the force necessary for the other coupling present this problem. It is easy to imagine that a small obstruction (a sandskom, for example) to the smoothest going coupling will necessitate a greater force to fasten/release that coupling which force tends towards the force necessary for the other coupling.

25 Accordingly, it is an object of the present invention to provide a medication delivery device with which the inadvertent disengagement of the driving means and plunger means from the plunger or stopper in the cartridge is avoided.

#### Summary of the invention

30 According to a first aspect of the invention a medication delivery device is provided which comprises

a cartridge assembly, having one end sealed with a pierceable sealing, said end of the cartridge assembly comprising coupling means for releasably mounting a needle

5

08/27/98

13:14

HEIDEN &amp; HOIBERG + 43508001

NR.571

06

3

assembly, and comprising a cartridge having a stopper adapted to receive plunger means,

a dosing assembly comprising plunger means,

and optionally a needle assembly,

wherein the cartridge assembly and the dosing assembly are coupled together, and the device further comprises means for securing that the plunger means abuts on the stopper during use of the device

In a preferred embodiment the dosing assembly is reusable and the cartridge assembly is disposable, and accordingly, a second aspect of the present invention is a medication delivery device wherein the dosing assembly is releasably coupled to the cartridge assembly.

By the term "use of the device" is meant the normal use, including measuring and delivering the medication, removing a cap from the cartridge assembly and/or needle as well as attaching and releasing the needle assembly. It is understood that the plunger means must disengage the stopper when the cartridge assembly is deliberately released from the dosing assembly because the medication in the cartridge has been exhausted and the cartridge assembly is to be discarded. In this situation the plunger means is to be retracted to the dosing assembly before assembling the device with a new cartridge assembly.

Securing the abutment of the plunger means on the stopper during use of the medication delivery device, in particular when the needle assembly is coupled to and/or decoupled from the cartridge assembly, may be carried out by a variety of means. In a preferred embodiment the abutment is secured by preventing the cartridge assembly from being inadvertently released from the dosing assembly.

Furthermore, it is a preferred aspect of the invention to provide a medication delivery device, which device is arranged for securing that the plunger means abuts on the stopper during coupling and/or decoupling of the needle assembly.

6

SAN00828626

08/07/98

13:14

HEIDEN &amp; HOIBERG - 43508801

MR. 571

07

4

In one embodiment of the invention the dosing assembly is coupled to the cartridge assembly at the end of the cartridge assembly opposite the means for mounting the needle assembly, and the plunger means is a rod element adapted to exert an axial movement of the stopper towards the sealed end of the cartridge.

5

Accordingly, it is an aspect of the present invention to provide a medication delivery device, wherein the means for coupling the dosing assembly and the cartridge assembly together are such that the coupling and/or decoupling of the needle assembly does not cause an axial movement of the cartridge assembly with respect to the dosing assembly. In this way it is assured that the rod element does not disengage the stopper in the cartridge when the user attaches the needle assembly or removes it after use. Thereby the user can be confident of the accuracy of the dosage selected.

10

15

The means for coupling the dosing assembly and the cartridge assembly together may be any suitable coupling, preferably a releasable coupling. Examples of the coupling are snap locks, such as snap locks with guidewire and sideways snap locks, snap locks released through threads, bayonet locks, luer locks, hinged locks, threaded locks and any suitable combinations thereof.

20

In particular, when the cartridge assembly is released from the dosing assembly through a movement including an axial movement, such as through a threaded coupling, it is preferred that the means for releasably coupling the needle assembly and the cartridge assembly together are such that the coupling and/or decoupling of the needle assembly cannot cause an axial movement of the cartridge assembly with respect to the dosing assembly. Thus, in that respect examples of the preferred couplings between the needle assembly and the cartridge assembly include releasable snap locks. Another preferred embodiment includes a safety on the coupling between the dosing assembly and the cartridge assembly, such as hinge on the coupling or a threaded coupling releasable only after exerting an axial pressure on the coupling.

25

30

35

According to the invention preferred combinations of couplings between the dosing assembly and the cartridge assembly and between the needle assembly and the cartridge assembly, respectively, are a threaded coupling combined with a snap

7

08/07/98

13:14

HEIDEN &amp; HOIBERG + 43580901

NR. 571

28

5

coupling, a bayonet lock or a luer lock combined with a snap lock, or a snap lock combined with a snap lock, or any other combination for which the couplings are independently working.

- 5 Another aspect of the present invention is a cartridge assembly for use in the medication delivery device according to the invention. The cartridge assembly comprises a cartridge for the medication to be delivered. The cartridge assembly has one end sealed with a pierceable sealing, said end of the cartridge assembly comprising coupling means for releasable mounting a needle assembly, and another end comprising coupling means adapted to engage a dosing assembly. Furthermore, the
- 10 cartridge comprises a stopper.

The cartridge assembly may further comprise a housing for protecting at least a part of the cartridge assembly.

15

In a preferred embodiment at least one of the coupling means of the cartridge assembly is unitarily moulded with the cartridge, and in a more preferred embodiment all the coupling means are unitarily moulded with the cartridge. In the latter case the cartridge assembly may be comprised of just one part, i.e. the cartridge including the

20 coupling means.

#### Drawings

Fig. 1 is an exploded perspective view of the medication delivery device.

25

Fig. 2 is a cross-sectional view showing part of the medication delivery device, 2a immediately after assembling before the first injection, and 2b after some time of use

30

Fig. 3 is a cross-sectional view showing the cartridge before assembling of the medication delivery device.

8

09/27/98

13:14

HEIDEN &amp; HOESER + 43588001

NR.571

09

8

**Detailed description of the invention**

A medication delivery device in accordance with the present invention is identified generally by the numeral 20 in Fig. 1 and 2. Medication delivery device 20 includes a dosing assembly 6, and cartridge assembly 1, a needle assembly 16 and a cap 14

The dosing assembly 6 is illustrated in Fig. 1 and 2. It is understood, however, that the dosing assembly 6 according to the invention may be any suitable dosing unit including plunger means, and accordingly, that variations from the depicted embodiment may be provided, and are considered to be within the scope of this invention. In the depicted embodiment the dosing assembly 6 includes a cylindrical housing surrounding the plunger means 17 of the dosing unit and having opposed proximal and distal ends

In one aspect of the invention the plunger means comprises a rod element 7 which is adapted to engage the stopper 4 of the cartridge assembly 1. The rod element 7 advances axially into the cartridge 5 during injections. The dosing assembly may have any suitable driving means for advancing the rod element 7.

The dosing unit 6 preferably also comprises scale means 10 indicating the dosing quantity selected by activating the dose setting means 9 for defining specified selected doses of medication to be delivered. The selected dose may be delivered by actuating the actuator button 18. The actuator button is part of the driving means of the dosing assembly exerting its force on the rod element 7.

The dosing assembly further comprises coupling means 8 adapted for engagement with the cartridge assembly. The coupling means 8 may be internal or external couplings. In a preferred embodiment the coupling 8 is an internal coupling.

The cartridge assembly 1 is illustrated in Fig. 1 and 2, and in greater detail in Fig. 3. In Fig. 1 cartridge assembly 1 includes a moulded cartridge 5 extending from proximal end 21 to distal end 22.

9



08/07/98

13:14

HEIDEN &amp; HOIBERG + 43500001

NR.571

10

7

At the distal end 22 of the cartridge assembly 1 is provided coupling means 2 for releasably mounting a needle assembly 11. At the proximal end 21 of the cartridge assembly 1 is provided coupling means 3 for mounting a dosing assembly 8. The coupling means are as described above.

5

Cartridge 5 also comprises a stopper 4 in sliding fluid tight engagement within said cartridge 5. The stopper 4 is adapted to receive the plunger means, such as a rod element 7 of the dosing assembly 8.

10

The cartridge assembly 1 may further comprise a housing for protecting some or all of the cartridge 5. When the cartridge assembly 1 includes a housing, one or both of the couplings 2, 3 of the cartridge may be moulded unitarily with the housing.

15

In a preferred embodiment at least one of the couplings 2, 3 is moulded unitarily with the cartridge 5, minimising the total number of parts of the device and thereby the production costs.

Instead of the protective housing the cartridge 5 may have integrally moulded reinforcements of the cartridge wall.

20

The depicted cartridge 5 is cylindrical having couplings 2, 3 at opposed ends. However, the cartridge may obtain any suitable form and the cross-section may be circular or non-circular, such as substantially triangular or oval.

25

In Fig. 1 and Fig. 2 the couplings 2, 3 are opposing each other. However, coupling 2 being separate from coupling 3 may be arranged in any angle with respect to coupling 3.

30

A suitable choice of material allows the cartridge to be at least partly transparent, whereby the user can see whether liquid is left in the cartridge.

Referring to Fig. 3 the coupling means of the cartridge are shown in greater detail. The coupling means 3 is an external thread, whereas the coupling means 2 is a recess for a snap lock of the needle assembly. Both coupling means are moulded unitarily with the cartridge.

35

08/07/98

13:14

HEIDEN &amp; HOIBERG + 43588801

NR.571

11

8

The device according to the invention may include a protective cap 14 that is removably mounted over the cartridge assembly 1 and/or the needle 11 and which is removed before injection of the medication in the cartridge 5. The cap further ensures that the content of the cartridge is protected against sunlight.

The various parts of the medication delivery device are advantageously made of plastics, e.g. by injection moulding

The medication delivery device 20 may further comprise any appropriate needle assembly 11, such as a double ended needle 13 having opposed proximal and distal points and a lumen extending axially therebetween.

A mounting hub 12 is engaged on the needle 13 and is removably connected to the coupling means 2 at the needle end of the cartridge assembly. The relative location of the mounting hub 12 ensures that the proximal point of the needle 13 will pierce the sealing when the mounting hub 12 is engaged with the coupling means 2 on the cartridge assembly 1.

The needle assembly 11 may further comprise a removable shield or cap 15 for protecting against accidental needle sticks.

The device according to the invention is suitable for delivering pre-set dosages of insulin, it is however understood that the device is suitable for the injection of pre-set dosages of other liquids.

In use the user will set the dose by means of the dose setting means 9. Before activating the actuator button 18 the cap 14 must be removed from the cartridge assembly 1 whereby the device 20 is prepared for an injection. The injection is effected by activating the actuator button 18, which again will effect the stopper 4 to be moved towards the needle at the sealed end 22 of the cartridge 5, thereby delivering the desired pre-set dosage. A subsequent dosage of medication will be set in exactly the same manner as described above. However, for such a subsequent dosage, the rod element 7 and the stopper 4 will be in a partly advanced position as

11

SAN00828631

08/07/98 13:14 HEIDEN & HOIBERG + 43500001

NR,571 12

9

starting point. Dose setting and injections can be carried out until all of the medication has been used.

08/07/98 13:14 HEIDEN &amp; HOIBERG + 43588801

NR. 571 13

10

Claims:

## 1. A medication delivery device comprising

5 a cartridge assembly, having one end sealed with a pierceable sealing, said end of the cartridge assembly comprising coupling means for releasably mounting a needle assembly, and comprising a cartridge having a stopper adapted to receive plunger means,

10 a dosing assembly comprising plunger means,

and optionally a needle assembly,

15 wherein the cartridge assembly and the dosing assembly are coupled together, and the device further comprises means for securing that the plunger means abuts on the stopper during use of the device.

2 A medication delivery device according to claim 1, wherein the dosing assembly is releasably coupled to the cartridge assembly.

20

3. A medication delivery device according to any of the preceding claims, wherein the device is arranged for securing that the plunger means abuts on the stopper during coupling and/or decoupling of the needle assembly.

25 4. A medication delivery device according to any of the preceding claims, wherein the plunger means comprises a rod element adapted to exert an axial movement of the stopper towards the sealed end of the cartridge.

30 5. A medication delivery device according to any of the preceding claims, wherein the means for releasably coupling the dosing assembly and the cartridge assembly together are such that the coupling and/or decoupling of the needle assembly does not cause an axial movement of the cartridge assembly with respect to the dosing assembly.

35

13

08/07/98

13:14

HEIDEN &amp; HOIBERG - 43588861

NR.571

14

11

6. A medication delivery device according to any of the preceding claims, wherein the dosing assembly is released from the cartridge assembly through a movement including an axial movement
- 5 7. A medication delivery device according to claim 6, wherein the dosing assembly is released from the cartridge assembly through a threaded coupling.
8. A medication delivery device according to any of the preceding claims, wherein the dosing assembly comprises scale means.
- 10 9. A medication delivery device according to any of the preceding claims, wherein the dosing assembly comprises dose setting means for defining specified selected doses of medication to be delivered
- 15 10. A medication delivery device according to any of the preceding claims, wherein the cartridge assembly comprises a housing.
11. A medication delivery device according to any of the preceding claims, wherein the cartridge is unitarily moulded with at least one coupling means.
- 20 12. A medication delivery device according to any of the preceding claims, further comprising a cap for protecting the needle assembly and/or the cartridge assembly.
- 25 13. A cartridge assembly for use in the medication delivery device as claimed in any of claims 1-12, having one end sealed with a pierceable sealing, said end of the cartridge assembly comprising coupling means for engaging a needle assembly, and another end comprising coupling means adapted to engage a dosing assembly, further comprising a cartridge said cartridge comprising a slidable stopper
- 30 14. A cartridge assembly according to claim 13, further comprising a housing.
- 35 15. A cartridge assembly according to claim 13 or 14, wherein the cartridge is unitarily moulded with at least one coupling means.

14

SAN00828634

08/07/98

13:14

HEIDEN & HOIBERG - 43508001

NR.571

15

12

5 16 A cartridge assembly according to any of claims 13-15, wherein the coupling means adapted to engage the dosing unit is such that coupling and/or decoupling of the needle assembly does not cause an axial movement of the cartridge assembly with respect to the dosing assembly.

10 17. A cartridge assembly according to any of claims 13-16, wherein the dosing assembly is released from the cartridge assembly through a movement including an axial movement

15 18 A cartridge assembly according to claim 17, wherein the dosing assembly is released from the cartridge assembly through a threaded coupling.

15

SAN00828635

08/07/98

13:14

HEIDEN & HOLBERG + 43500001

Modtaget PD

NR. 571

16

- 8 JULI 1998

1/2

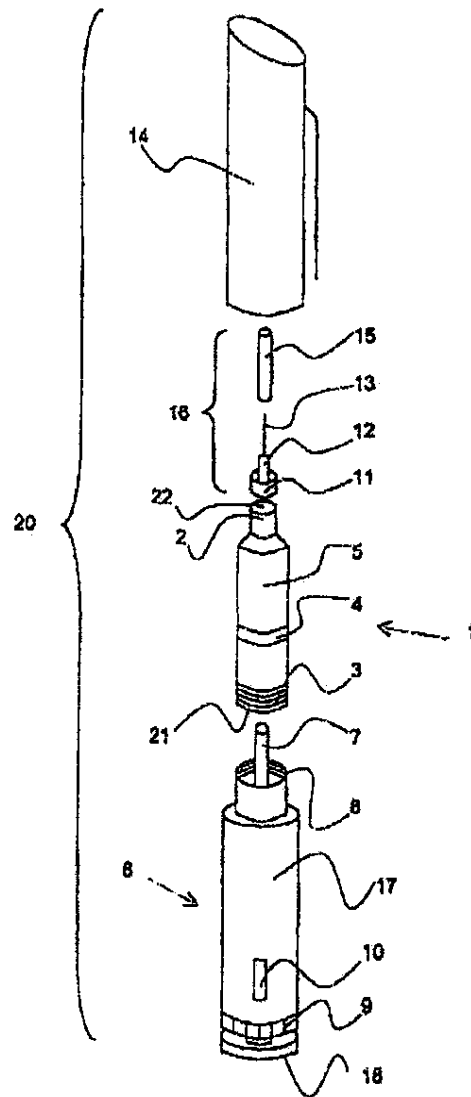


Fig. 1

08/27/98

13:14

HEIDEN & HOIBERG • 43508001

Modtaget PC

- 8 JULI 1998

NR. 571

17

2/2

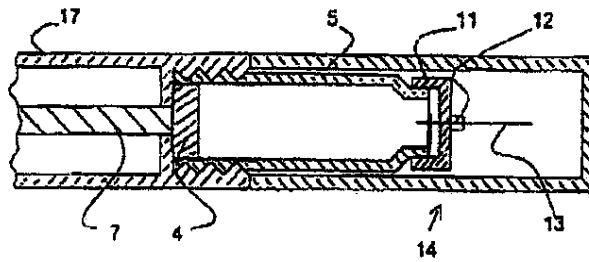


Fig. 2 a

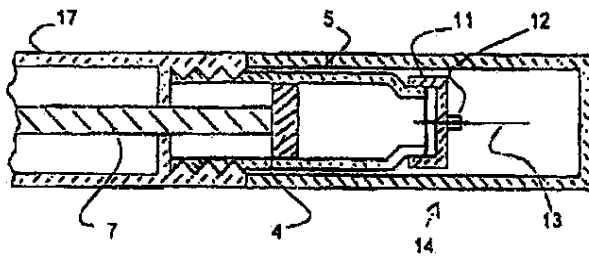


Fig. 2 b

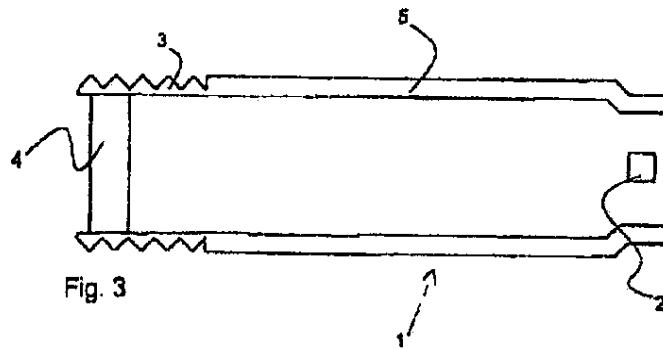


Fig. 3



PM 1472235



# THE UNITED STATES OF AMERICA

**TO ALL TO WHOM THESE PRESENTS SHALL COME:**

**UNITED STATES DEPARTMENT OF COMMERCE**

**United States Patent and Trademark Office**

**June 28, 2006**

**THIS IS TO CERTIFY THAT ANNEXED IS A TRUE COPY FROM THE  
RECORDS OF THIS OFFICE OF THE FILE WRAPPER AND CONTENTS  
OF:**

**APPLICATION NUMBER: 60/098,707**

**FILING DATE: September 01, 1998**


**By Authority of the**

**Under Secretary of Commerce for Intellectual Property  
and Director of the United States Patent and Trademark Office**




*W. Montgomery*  
**W. MONTGOMERY**  
**Certifying Officer**

**SAN00761740**

		Subclass	ISSUE CLASSIFICATION <i>2500</i>
		Class	

PROVISIONAL  
APPLICATION  
NUMBER

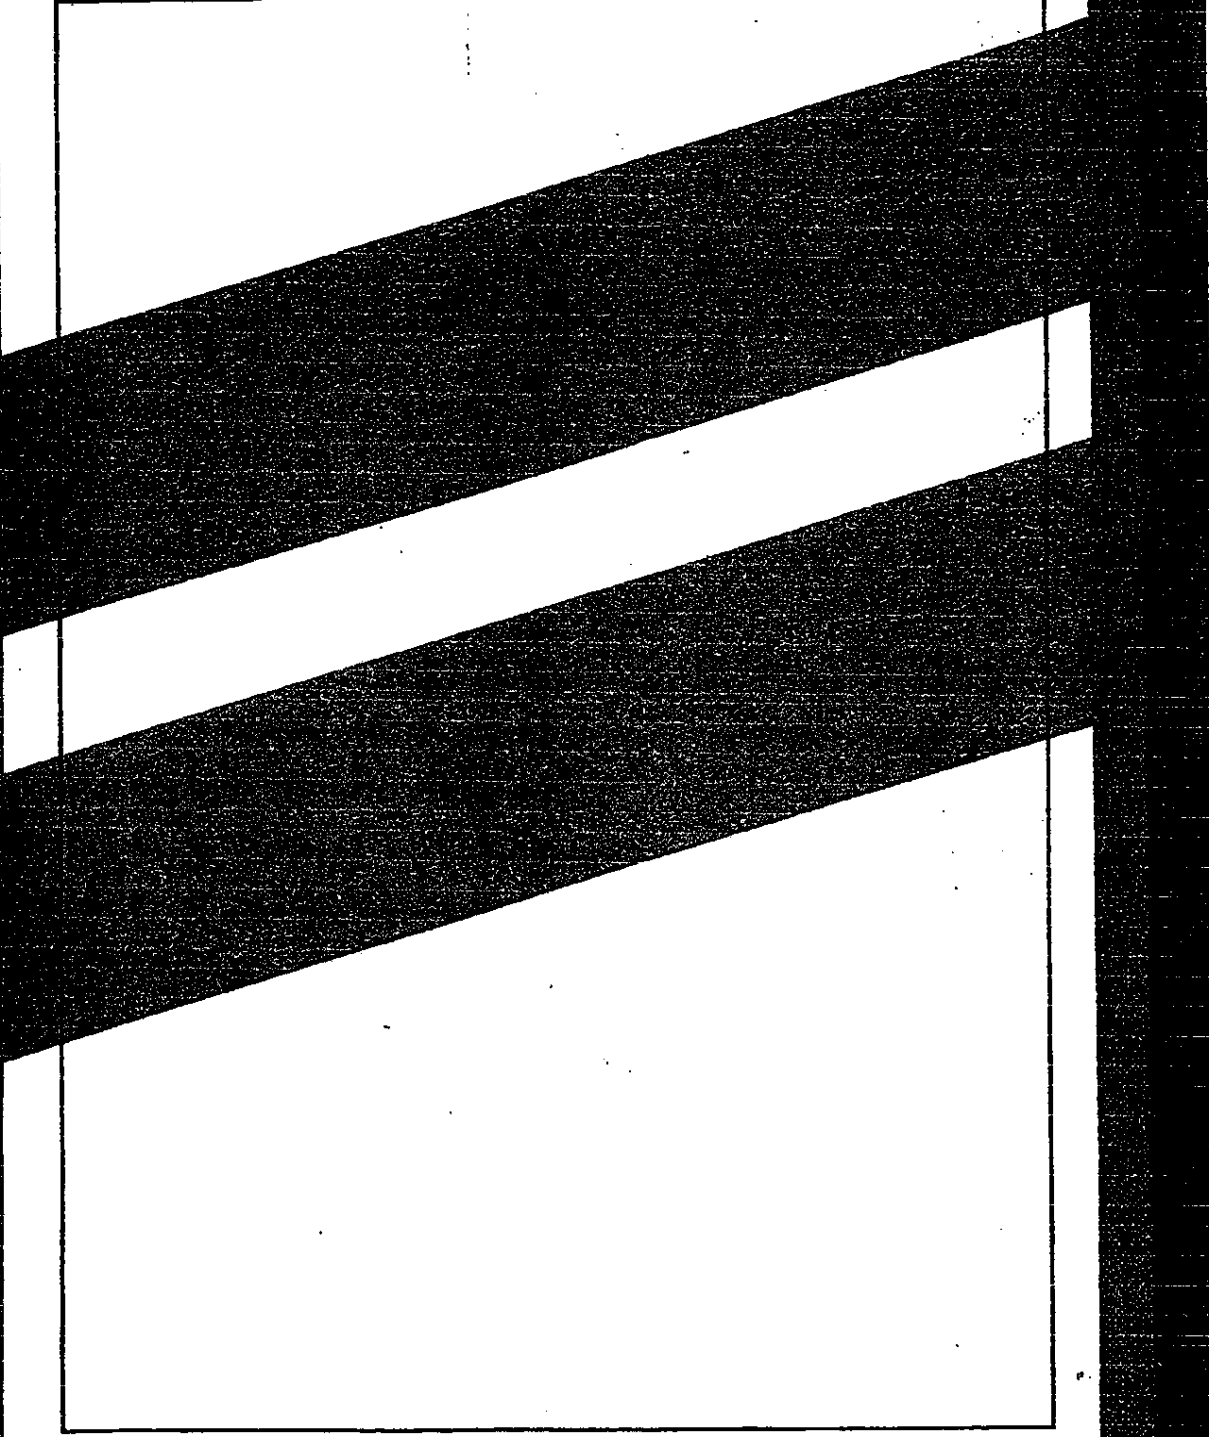

Form PTO-1625  
(Rev. 5/95)

*21* *HT* *KN*

(FACE)

SERIAL NUMBER 60/098,707 PROVISIONAL	FILING DATE 09/01/98	CLASS	GROUP ART UNIT 0000	ATTORNEY DOCKET NO. 5533.003-US	
<b>APPLICANT</b> THOMAS BUCH-RASMUSSEN, GENTOFTE, DENMARK; BENNY MUNK, VANLOSE, DENMARK; JENS-ULRIK POULSEN, VIRUM, DENMARK; HENRIK LJUNGREEN, BALLERUP, DENMARK; PETER MOLLER JENSEN, HORSHOLM, DENMARK; JENS MOLLER JENSEN, KOBENHAVN K, DENMARK.  <b>**CONTINUING DOMESTIC DATA*****</b> VERIFIED  <b>**371 (NAT'L STAGE) DATA*****</b> VERIFIED  <b>**FOREIGN APPLICATIONS*****</b> VERIFIED					
Foreign Priority claimed <input type="checkbox"/> yes <input type="checkbox"/> no 35 USC 119 (a-d) conditions met <input type="checkbox"/> yes <input type="checkbox"/> no <input type="checkbox"/> Met after Allowance Verified and Acknowledged <u>Examiner's Initials</u> <u>Initials</u>		STATE OR COUNTRY DKX	SHEETS DRAWING 2	TOTAL CLAIMS	INDEPENDENT CLAIMS
<b>ADDRESS</b> STEVE T ZELSON NOVO NORDISK OF NORTH AMERICA INC 405 LEXINGTON AVENUE SUITE 6400 NEW YORK NY 10174-6401					
<b>TITLE</b> MEDICAL DEVICE					
FILING FEE RECEIVED  \$150	FEES: Authority has been given in Paper No. _____ to charge/credit DEPOSIT ACCOUNT NO. _____ for the following:		<input type="checkbox"/> All Fees <input type="checkbox"/> 1.16 Fees (Filing) <input type="checkbox"/> 1.17 Fees (Processing Ext. of time) <input type="checkbox"/> 1.18 Fees (Issue) <input type="checkbox"/> Other _____ <input type="checkbox"/> Credit		

SAN00761742

PATENT APPLICATION SERIAL NO. \_\_\_\_\_

U.S. DEPARTMENT OF COMMERCE  
PATENT AND TRADEMARK OFFICE  
FEE RECORD SHEET

03/03/1998 CONTINUED 00000014 141447 60088707  
01 FC:114 150.00 CH

PTO-1556  
(5/87)

SAN00761743

A/psov

Attorney Docket No.: 5533.003-US

PATENT

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

EXPRESS MAIL CERTIFICATE

Assistant Commissioner for Patents  
Washington, DC 20231

Re: U.S. Provisional Application for  
"Medical Device"  
Applicants: Buch-Rasmussen et al.

Sir:

Express Mail Label No. EL021372400US

Date of Deposit September 1, 1998

I hereby certify that the following attached paper(s) or fee

1. Filing Under 37 C.F.R. §1.53(c) (in duplicate)
2. Provisional Application

are being deposited with the United States Postal Service "Express Mail Post Office to Addressee" under 37 C.F.R. 1.10 on the date indicated above and is addressed to the Commissioner of Patents and Trademarks, Washington, DC 20231.

Gina Maldonado

(Name of person mailing paper(s) or fee)

*Gina Maldonado*

(Signature of person mailing paper(s) or fee)

Mailing Address:

Novo Nordisk of North America, Inc.  
405 Lexington Avenue, Suite 6400  
New York, NY 10017  
(212) 867-0123

SAN00761744

# PATENT

**FILING UNDER 37 C.F.R. §1.53(c)**

Express Mail Label No. EL021372400US  
Date of Deposit September 1, 1998

This is a request for filing a provisional application under 37 C.F.R. §1.53(c),  
of the inventors:

Munk, Benny, a citizen of Denmark, residing at Bæverskov Allé 52, DK-2720 Vanløse, Denmark;

Ljunggreen, Henrik, a citizen of Denmark, residing at Jonstrupvej 244 A, DK-2750 Ballerup, Denmark;

Jensen, Jens Møller, a citizen of Denmark, residing at Nyhavn 37, DK-1051  
København K, Denmark

**The provisional application contains:**

12 pages of specification

2 sheets of drawings

Address all future communications to Steve T. Zelson, Esq., Novo Nordisk of North America, Inc., 405 Lexington Avenue, Suite 6400, New York, NY 10174-6401.



Attorney Dkt. #: 5533.003-45

1

The present invention relates to a medication delivery device having a cartridge assembly and a dosing assembly coupled together for delivering selected doses of medication.

5

#### Background

Some medication, such as insulin is self-administered. The typical diabetes patient will require injections of insulin several times during the day. The required insulin dose will vary from patient to patient, and will for each patient often also vary during the day. Each patient will often establish a regimen for the insulin administration adjusted to his or her insulin need as well as lifestyle. Medication delivery pens have been developed to facilitate the self-administration of medication, such as insulin.

One prior art medication delivery pen includes a pen body assembly comprising a medication cartridge and a plunger device. A needle assembly may be connected to the pen body assembly. The medication is delivered by moving or pressing a plunger in the direction of the needle assembly thereby delivering the medication. When the medication in the cartridge is exhausted the pen body assembly is discarded. Depending on the medication needs for each individual the medication in the cartridge will last for several days. During this period the needle assembly will often have to be displaced by a new assembly or new needle due to increasing bluntness of the needle making injections painful for the patient.

Due to the environmental and economical reasons medication delivery pens were developed, for which pens only a part of the pen was discarded after medication exhaustion, such as the cartridge only.

An example of prior art pens is disclosed in EP 0 688 571 wherein a medication delivery pen has a reusable pen body assembly and a disposable cartridge assembly that are threadably engageable with one another. The disposable cartridge assembly includes a plunger and can releasably receive a needle cannula assembly through a threaded coupling. A driving means in the pen body assembly engages the plunger after engagement of the pen body assembly and the cartridge assembly, whereby the pen is ready for dosing the medicine within the cartridge. The cartridge

EP 0 688 571 B1



holder assembly can be disassembled from the pen body assembly after the medication therein has been exhausted, discarded and replaced.

5 However, a drawback of the above-mentioned pen is that the driving means of the pen body may be disengaged from the plunger of the cartridge during normal use resulting in inaccurate dosing of the medicine.

10 For the device disclosed in EP 0 688 571, the needle assembly will often have to be replaced independently of replacement of the cartridge. When releasing the needle assembly from the cartridge assembly the cartridge assembly may inadvertently be released or partly released from the pen body assembly. Thereby the driving means of the pen body may be disengaged from the plunger of the cartridge. In particular if the pen body assembly is only partly released from the cartridge assembly the user will most probably not be aware of the disengagement but will receive only a portion or even nothing of the medicine.

15 Even pens with differently pitched threaded couplings and/or threaded couplings having different diameters whereby the force exerted to fasten and/or release one coupling is greater than the force necessary for the other coupling present this problem. It is easy to imagine that a small obstruction (a sandskorn, for example) to the smoothest going coupling will necessitate a greater force to fasten/release that coupling which force tends towards the force necessary for the other coupling.

20 Accordingly, it is an object of the present invention to provide a medication delivery device with which the inadvertent disengagement of the driving means and plunger means from the plunger or stopper in the cartridge is avoided.

#### Summary of the invention

30 According to a first aspect of the invention a medication delivery device is provided which comprises

a cartridge assembly, having one end sealed with a pierceable sealing, said end of the cartridge assembly comprising coupling means for releasably mounting a needle



In one embodiment of the invention the dosing assembly is coupled to the cartridge assembly at the end of the cartridge assembly opposite the means for mounting the needle assembly, and the plunger means is a rod element adapted to exert an axial movement of the stopper towards the sealed end of the cartridge.

5

Accordingly, it is an aspect of the present invention to provide a medication delivery device, wherein the means for coupling the dosing assembly and the cartridge assembly together are such that the coupling and/or decoupling of the needle assembly does not cause an axial movement of the cartridge assembly with respect to the dosing assembly. In this way it is assured that the rod element does not disengage the stopper in the cartridge when the user attaches the needle assembly or removes it after use. Thereby the user can be confident of the accuracy of the dosage selected.

15

The means for coupling the dosing assembly and the cartridge assembly together may be any suitable coupling, preferably a releasable coupling. Examples of the coupling are snap locks, such as snap locks with guidewire and sideways snap locks, snap locks released through threads, bajonet locks, luer locks, hinged locks, threaded locks and any suitable combinations thereof.

20

In particular, when the cartridge assembly is released from the dosing assembly through a movement including an axial movement, such as through a threaded coupling, it is preferred that the means for releasably coupling the needle assembly and the cartridge assembly together are such that the coupling and/or decoupling of the needle assembly cannot cause an axial movement of the cartridge assembly with respect to the dosing assembly. Thus, in that respect examples of the preferred couplings between the needle assembly and the cartridge assembly include releasable snap locks. Another preferred embodiment includes a safety on the coupling between the dosing assembly and the cartridge assembly, such as hinge on the coupling or a threaded coupling releasable only after exerting an axial pressure on the coupling.

25

According to the invention preferred combinations of couplings between the dosing assembly and the cartridge assembly and between the needle assembly and the cartridge assembly, respectively, are a threaded coupling combined with a snap

30

coupling, a bajonet lock or a luer lock combined with a snap lock, or a snap lock combined with a snap lock, or any other combination for which the couplings are independently working.

5 Another aspect of the present invention is a cartridge assembly for use in the medication delivery device according to the invention. The cartridge assembly comprises a cartridge for the medication to be delivered. The cartridge assembly has one end sealed with a pierceable sealing, said end of the cartridge assembly comprising coupling means for releasable mounting a needle assembly, and another end comprising coupling means adapted to engage a dosing assembly. Furthermore, the  
10 cartridge comprises a stopper.

The cartridge assembly may further comprise a housing for protecting at least a part of the cartridge assembly.

15 In a preferred embodiment at least one of the coupling means of the cartridge assembly is unitarily moulded with the cartridge, and in a more preferred embodiment all the coupling means are unitarily moulded with the cartridge. In the latter case the cartridge assembly may be comprised of just one part, i.e. the cartridge including the  
20 coupling means.

#### Drawings

Fig. 1 is an exploded perspective view of the medication delivery device.

25

Fig. 2 is a cross-sectional view showing part of the medication delivery device, 2a immediately after assembling before the first injection, and 2b after some time of use.

30 Fig. 3 is a cross-sectional view showing the cartridge before assembling of the medication delivery device.

60096707.000496

**Detailed description of the invention**

A medication delivery device in accordance with the present invention is identified generally by the numeral 20 in Fig. 1 and 2. Medication delivery device 20 includes a dosing assembly 6, and cartridge assembly 1, a needle assembly 16 and a cap 14.

The dosing assembly 6 is illustrated in Fig. 1 and 2. It is understood, however, that the dosing assembly 6 according to the invention may be any suitable dosing unit including plunger means, and accordingly, that variations from the depicted embodiment may be provided, and are considered to be within the scope of this invention. In the depicted embodiment the dosing assembly 6 includes a cylindrical housing surrounding the plunger means 17 of the dosing unit and having opposed proximal and distal ends.

In one aspect of the invention the plunger means comprises a rod element 7 which is adapted to engage the stopper 4 of the cartridge assembly 1. The rod element 7 advances axially into the cartridge 5 during injections. The dosing assembly may have any suitable driving means for advancing the rod element 7.

The dosing unit 6 preferably also comprises scale means 10 indicating the dosing quantity selected by activating the dose setting means 9 for defining specified selected doses of medication to be delivered. The selected dose may be delivered by actuating the actuator button 18. The actuator button is part of the driving means of the dosing assembly exerting its force on the rod element 7.

The dosing assembly further comprises coupling means 8 adapted for engagement with the cartridge assembly. The coupling means 8 may be internal or external couplings. In a preferred embodiment the coupling 8 is an internal coupling.

The cartridge assembly 1 is illustrated in Fig. 1 and 2, and in greater detail in Fig. 3. In Fig. 1 cartridge assembly 1 includes a moulded cartridge 5 extending from proximal end 21 to distal end 22.

At the distal end 22 of the cartridge assembly 1 is provided coupling means 2 for releasably mounting a needle assembly 11. At the proximal end 21 of the cartridge assembly 1 is provided coupling means 3 for mounting a dosing assembly 6. The coupling means are as described above.

5

Cartridge 5 also comprises a stopper 4 in sliding fluid tight engagement within said cartridge 5. The stopper 4 is adapted to receive the plunger means, such as a rod element 7 of the dosing assembly 6.

10

The cartridge assembly 1 may further comprise a housing for protecting some or all of the cartridge 5. When the cartridge assembly 1 includes a housing, one or both of the couplings 2, 3 of the cartridge may be moulded unitarily with the housing.

15

In a preferred embodiment at least one of the couplings 2, 3 is moulded unitarily with the cartridge 5, minimising the total number of parts of the device and thereby the production costs.

20

Instead of the protective housing the cartridge 5 may have integrally moulded reinforcements of the cartridge wall.

25

The depicted cartridge 5 is cylindrical having couplings 2, 3 at opposed ends. However, the cartridge may obtain any suitable form and the cross-section may be circular or non-circular, such as substantially triangular or oval.

30

In Fig. 1 and Fig. 2 the couplings 2, 3 are opposing each other. However, coupling 2 being separate from coupling 3 may be arranged in any angle with respect to coupling 3.

A suitable choice of material allows the cartridge to be at least partly transparent, whereby the user can see whether liquid is left in the cartridge.

35

Referring to Fig. 3 the coupling means of the cartridge are shown in greater detail. The coupling means 3 is an external thread, whereas the coupling means 2 is a recess for a snap lock of the needle assembly. Both coupling means are moulded unitarily with the cartridge.

E0096707-020130

5 The device according to the invention may include a protective cap 14 that is removably mounted over the cartridge assembly 1 and/or the needle 11 and which is removed before injection of the medication in the cartridge 5. The cap further ensures that the content of the cartridge is protected against sunlight.

The various parts of the medication delivery device are advantageously made of plastics, e.g. by injection moulding.

10 The medication delivery device 20 may further comprise any appropriate needle assembly 11, such as a double ended needle 13 having opposed proximal and distal points and a lumen extending axially therebetween.

15 A mounting hub 12 is engaged on the needle 13 and is removably connected to the coupling means 2 at the needle end of the cartridge assembly. The relative location of the mounting hub 12 ensures that the proximal point of the needle 13 will pierce the sealing when the mounting hub 12 is engaged with the coupling means 2 on the cartridge assembly 1.

20 The needle assembly 11 may further comprise a removable shield or cap 15 for protecting against accidental needle sticks.

25 The device according to the invention is suitable for delivering pre-set dosages of insulin, it is however understood that the device is suitable for the injection of pre-set dosages of other liquids.

30 In use the user will set the dose by means of the dose setting means 9. Before activating the actuator button 18 the cap 14 must be removed from the cartridge assembly 1 whereby the device 20 is prepared for an injection. The injection is effected by activating the actuator button 18, which again will effect the stopper 4 to be moved towards the needle at the sealed end 22 of the cartridge 5, thereby delivering the desired pre-set dosage. A subsequent dosage of medication will be set in exactly the same manner as described above. However, for such a subsequent dosage, the rod element 7 and the stopper 4 will be in a partly advanced position as

starting point. Dose setting and injections can be carried out until all of the medication has been used.

60098707 20286009



Claims:

## 1. A medication delivery device comprising

5 a cartridge assembly, having one end sealed with a pierceable sealing, said end of the cartridge assembly comprising coupling means for releasably mounting a needle assembly, and comprising a cartridge having a stopper adapted to receive plunger means,

10 a dosing assembly comprising plunger means,

and optionally a needle assembly,

15 wherein the cartridge assembly and the dosing assembly are coupled together, and the device further comprises means for securing that the plunger means abuts on the stopper during use of the device.

2. A medication delivery device according to claim 1, wherein the dosing assembly is releasably coupled to the cartridge assembly.

20 3. A medication delivery device according to any of the preceding claims, wherein the device is arranged for securing that the plunger means abuts on the stopper during coupling and/or decoupling of the needle assembly.

25 4. A medication delivery device according to any of the preceding claims, wherein the plunger means comprises a rod element adapted to exert an axial movement of the stopper towards the sealed end of the cartridge.

30 5. A medication delivery device according to any of the preceding claims, wherein the means for releasably coupling the dosing assembly and the cartridge assembly together are such that the coupling and/or decoupling of the needle assembly does not cause an axial movement of the cartridge assembly with respect to the dosing assembly.

35

ESTER 20/08/07 10:04:58



12

16. A cartridge assembly according to any of claims 13-15, wherein the coupling means adapted to engage the dosing unit is such that coupling and/or decoupling of the needle assembly does not cause an axial movement of the cartridge assembly with respect to the dosing assembly.

17. A cartridge assembly according to any of claims 13-16, wherein the dosing assembly is released from the cartridge assembly through a movement including an axial movement.

18. A cartridge assembly according to claim 17, wherein the dosing assembly is released from the cartridge assembly through a threaded coupling.

60058707 1000190

1/2

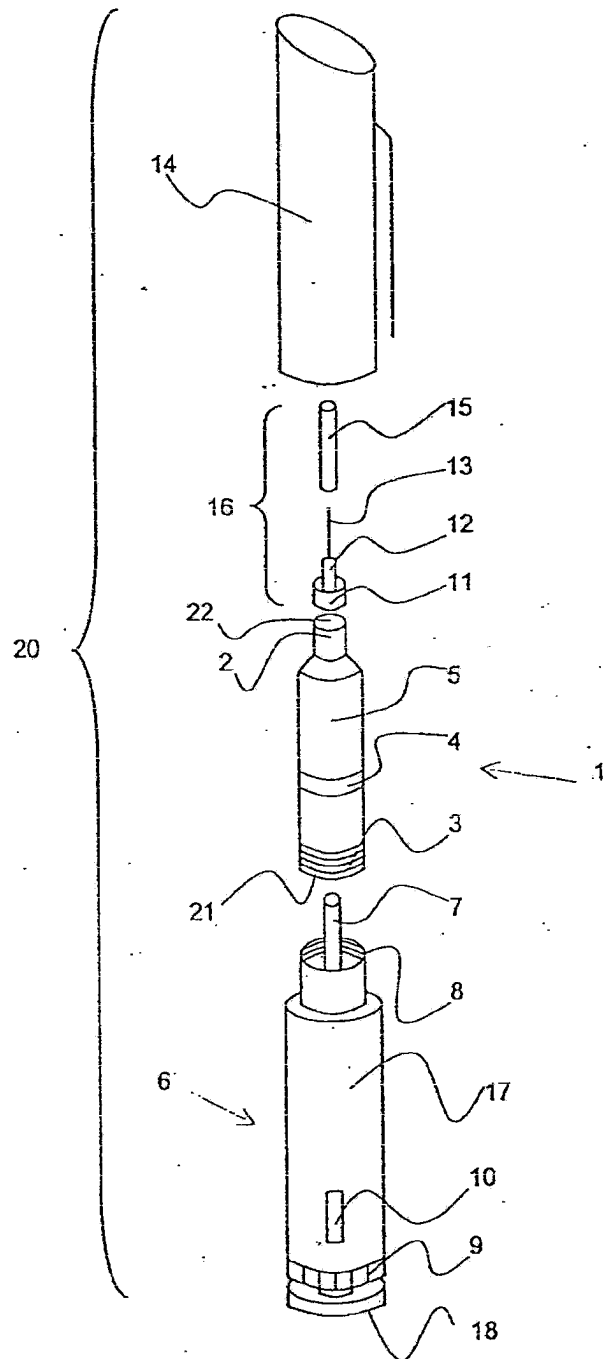


Fig. 1

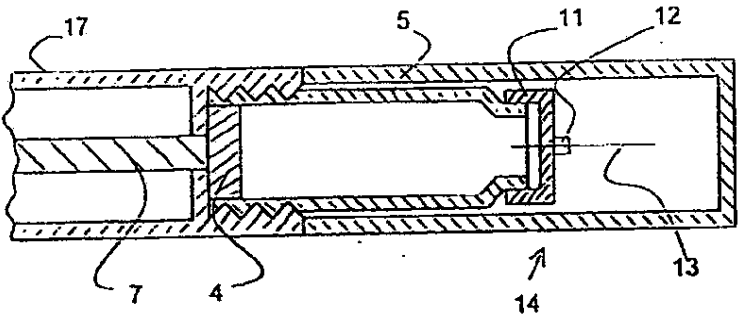


Fig. 2 a

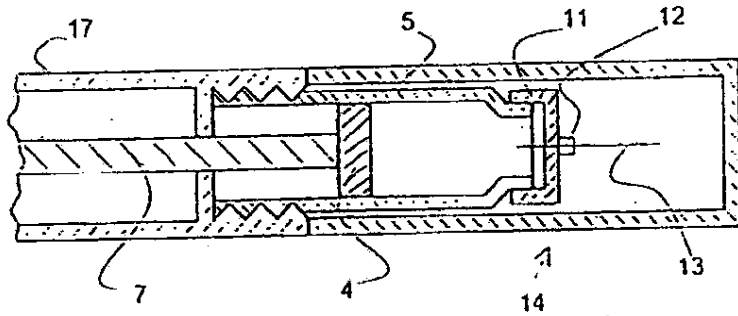


Fig. 2 b

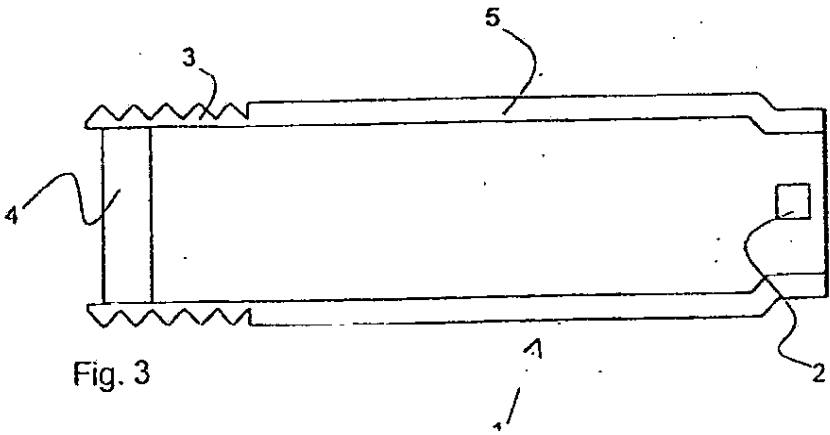


Fig. 3

Case 1:05-cv-00645-SLR Document 176-20 Filed 10/01/2007 Page 37 of 58

PTO/SB/68 (11-04)

Approved for use through 7/31/2008. OMB 0651-0031

U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

**REQUEST FOR ACCESS TO AN ABANDONED APPLICATION UNDER 37 CFR 1.14**

Bring completed form to:  
File Information Unit, Room 2E04  
2900 Crystal Drive  
Arlington, VA 22202-3514

Telephone: (703) 308-2733

In re Application of

Application Number

60/098 707

Filed

Sept 1, 1998

Paper No. 2

I hereby request access under 37 CFR 1.14(a)(1)(iv) to the application file record of the above-identified ABANDONED application, which is not within the file jacket of a pending Continued Prosecution Application (CPA) (37 CFR 1.53(d)) and which is identified in, or to which a benefit is claimed, in the following document (as shown in the attachment):

United States Patent Application Publication No. \_\_\_\_\_, page, \_\_\_\_\_ line \_\_\_\_\_

United States Patent Number 6582408, column \_\_\_\_\_, line, \_\_\_\_\_ or

WIPO Pub. No. \_\_\_\_\_, page \_\_\_\_\_, line \_\_\_\_\_

**Related Information About Access to Applications Maintained in the Image File Wrapper System (IFW) and Access to Pending Applications in General**

A member of the public, acting without a power to inspect, cannot order applications maintained in the IFW system through the FIU. If the member of the public is entitled to a copy of the application file, then the file is made available through the Public Patent Application Information Retrieval system (Public PAIR) on the USPTO internet web site ([www.uspto.gov](http://www.uspto.gov)). Terminals that allow access to Public PAIR are available in the Public Search Room. The member of the public may also be entitled to obtain a copy of all or part of the application file upon payment of the appropriate fee. Such copies must be purchased through the Office of Public Records upon payment of the appropriate fee (37 CFR 1.19(b)).

For published applications that are still pending, a member of the public may obtain a copy of:

the file contents; the pending application as originally filed; or any document in the file of the pending application.

For unpublished applications that are still pending:

- (1) If the benefit of the pending application is claimed under 35 U.S.C. 119(e), 120, 121, or 365 in another application that has: (a) issued as a U.S. patent, or (b) published as a statutory invention registration, a U.S. patent application publication, or an international patent application publication in accordance with PCT Article 21(2), a member of the public may obtain a copy of: the file contents; the pending application as originally filed; or any document in the file of the pending application.
- (2) If the application is incorporated by reference or otherwise identified in a U.S. patent, a statutory invention registration, a U.S. patent application publication, or an international patent application publication in accordance with PCT Article 21(2), a member of the public may obtain a copy of the pending application as originally filed.

Darlene Jones

Signature

Darlene Jones

Typed or printed name

Registration Number, if applicable

703 418 0330

Telephone Number

Date

10.6.05

FOR USE ONLY  
**RECEIVED**

Approved by OCT 07 2005  
(initials)

Unit: File Information Unit

This collection of information is required by 37 CFR 1.11 and 1.14. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.11 and 1.14. This collection is estimated to take 12 minutes to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. BRING TO: File Information Unit, Room 2E04, 2900 Crystal Drive, Arlington, Virginia.

If you need assistance in completing the form, call 1-800-PTO-9199 and select option 2.

SAN00761761



US006582408B1

(12) **United States Patent**  
**Buch-Rasmussen et al.**

(10) Patent No.: **US 6,582,408 B1**  
 (45) Date of Patent: **Jun. 24, 2003**

(54) **MEDICAL DEVICE**

(76) Inventors: **Thomas Buch-Rasmussen, Dalvej 28, DK-2820 Gentofte (DK); Benny Munk, Bjæverskov Allé 52, DK-2650 Hvidovre (DK); Jens Ulrik Poulsen, Virumgade 54 C, DK-2830 Virum (DK); Henrik Ljunggren, Jønstрупvej 244A, DK-2750 Ballerup (DK); Peter Møller Jensen, Sveinstrupvej 6, D-2970 Høesholm (DK); Jens Møller Jensen, Nyhavn 37, DK-1051 Copenhagen K (DK)**

WO WO 93/00943 1/1993  
 WO WO 94/21213 9/1994  
 WO WO 95/13842 5/1995  
 WO 0 488 571 A1 12/1995  
 WO WO 96/02290 2/1996  
 WO WO 97/49620 12/1997  
 WO WO 99/16487 4/1999

DO NOT  
 need

**OTHER PUBLICATIONS**

Abstract of Australian patent application AU-A-73 632/81.

\* cited by examiner

**Primary Examiner**—Brian L. Casler  
**Assistant Examiner**—Kevin C. Simmons  
 (74) **Attorney, Agent, or Firm**—Marco A. Begun, Esq.; Richard W. Bock, Esq.; Reza Green, Esq.

(57) **ABSTRACT**

The present invention relates to a medication delivery device comprising a cartridge assembly, a dosing assembly and optionally a needle assembly. The cartridge assembly comprises a cartridge having a stopper adapted to receive a plunger. Furthermore, the cartridge assembly has one end sealed with a pierceable sealing, said end comprising coupling device for engaging a needle assembly, and another end comprising coupling device for engaging the dosing assembly. The dosing assembly comprises a plunger and has coupling device for engaging the cartridge assembly. The cartridge assembly and the dosing assembly are coupled together for delivering selected doses of medication. The device further comprises mechanism for securing that the plunger abuts on the stopper during use of the device, in particular when the dosing assembly is releasably coupled to the cartridge assembly. The securing mechanism is preferably a mechanism for preventing the cartridge assembly from being inadvertently released from the dosing assembly. The cartridge is preferably molded from a plastic material, such as a transparent material, and may be housed in a cartridge housing for protection of the cartridge. The medication delivery device is especially suitable for delivering insulin, growth hormone or the like medicines.

(\*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: 09/348,748

(22) Filed: Jul 8, 1999

**Related U.S. Application Data**

(60) Provisional application No. 60/084,707, filed on Sep. 1, 1998.

(30) **Foreign Application Priority Data**

Jul. 8, 1998 (DK) ..... PA 1998 00910  
 Nov. 17, 1998 (DK) ..... PA 1998 01501

(51) Int. Cl.<sup>7</sup> ..... A61M 5/00  
 (52) U.S. Cl. ..... 604/232; 604/187  
 (58) Field of Search ..... 604/186, 187, 604/232, 188, 192, 195, 207-218, 200, 201, 228, 233, 234

(56) **References Cited**


**U.S. PATENT DOCUMENTS**

4,744,790 A 5/1988 Jaschowski et al. .... 604/232  
 4,865,591 A 9/1989 Sumi ..... 604/186  
 4,973,318 A 11/1990 Holm et al. .... 604/208  
 4,990,142 A 2/1991 Hoffman et al. .... 604/232  
 5,364,369 A 11/1994 Reynolds ..... 604/187  
 5,688,251 A 11/1997 Chasoch ..... 604/208

**FOREIGN PATENT DOCUMENTS**


EP 0 702 970 A2 3/1996

11 Claims, 2 Drawing Sheets

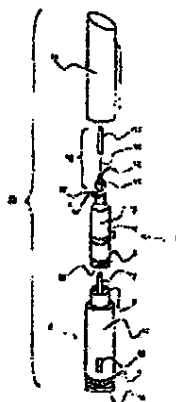

UNIT OF PROTECTION  
S ORIGINALLY FILED

United States Patent & Trademark Office  
Office of Initial Patent Examination -- Scanning Division

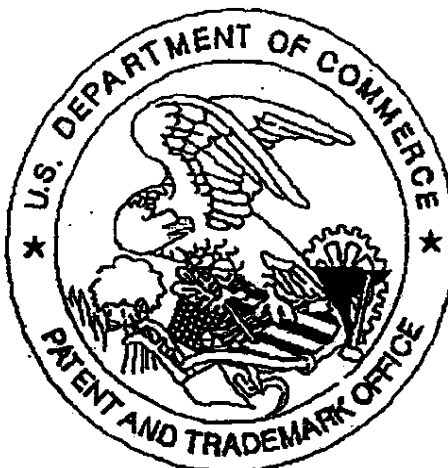


50093707-050196

Application deficiencies found during scanning:

1. Application papers are not suitable for scanning and are not in compliance with 37 CFR 1.52 because:
  - ☐ All sheets must be the same size and either A4 (21 cm x 29.7 cm) or 8-1/2" x 11". Pages \_\_\_\_\_ do not meet these requirements.
  - ☐ Papers are not flexible, strong, smooth, non-shiny, durable, and white.
  - ☐ Papers are not typewritten or mechanically printed in permanent ink on one side.
  - ☐ Papers contain improper margins. Each sheet must have a left margin of at least 2.5 cm (1") and top, bottom and right margins of at least 2.0 cm (3/4").
  - ☐ Papers contain hand lettering.
2. Drawings are not in compliance and were not scanned because:
  - ☐ The drawings or copy of drawings are not suitable for electronic reproduction.
  - ☐ All drawings sheets are not the same size. Pages must be either A4 (21 cm x 29.7 cm) or 8-1/2" x 11".
  - ☐ Each sheet must include a top and left margin of at least 2.5 cm (1"), a right margin of at least 1.5 cm (9/16") and a bottom margin of at least 1.0 cm (3/8").
3. Page(s) \_\_\_\_\_ are not of sufficient clarity, contrast and quality for electronic reproduction.
4. Page(s) \_\_\_\_\_ are missing.
5. OTHER: No Declaration.



PAT  
||

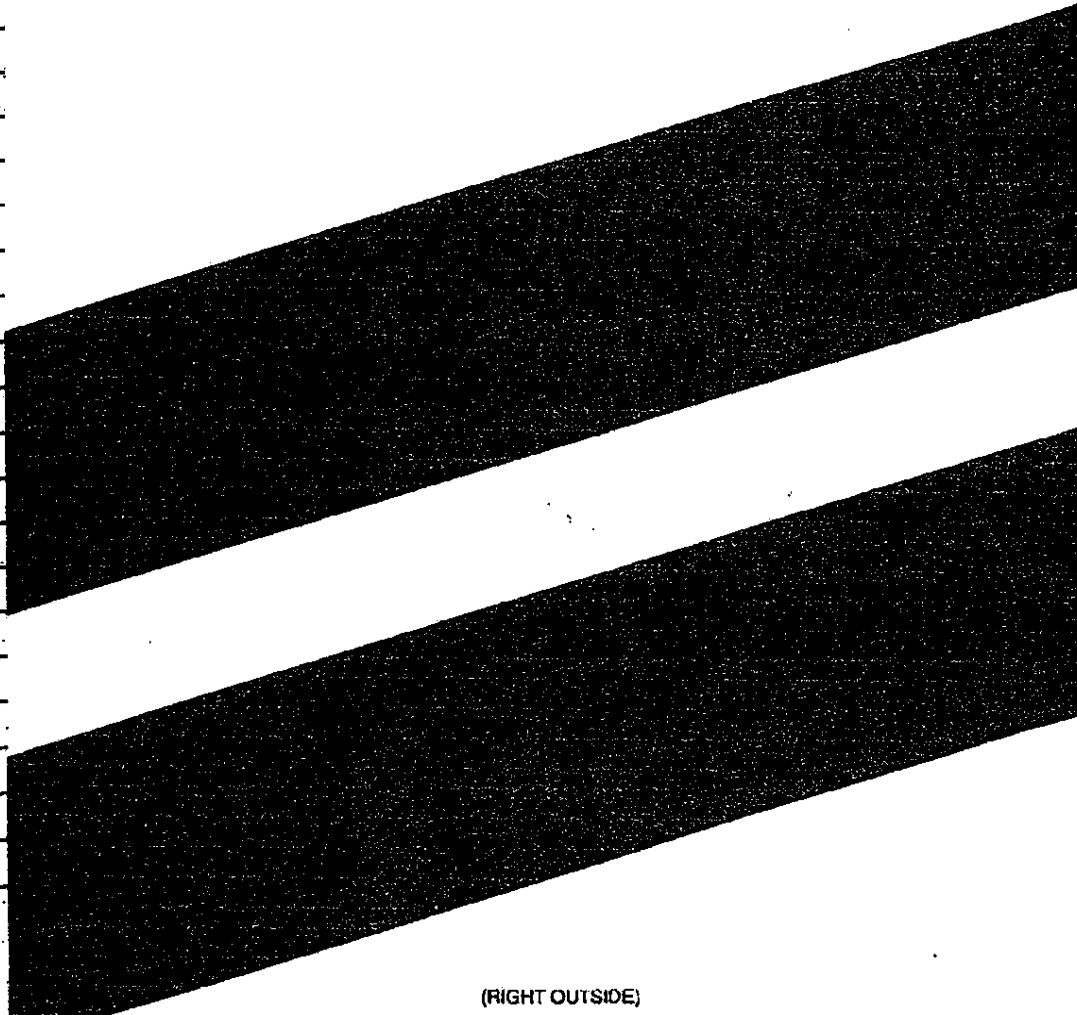

(RIGHT OUTSIDE)

POSITION		ID NO.	DATE
CLASSIFIER			
EXAMINER	OK	71473	10-2-88
TYPIST			
VERIFIER			
CORPS CORR.			
SPEC. HAND			
FILE MAINT			
DRAFTING			

(LEFT INSIDE)

SAN00761765

PATENT APPLICATION



60098707

Date  
Entered  
for  
Counting

CONTENTS

Date  
Received  
or  
Mailed

1. Application \_\_\_\_\_ papers.

2. *Request for Accession*

3. \_\_\_\_\_

4. \_\_\_\_\_

11. \_\_\_\_\_

12. \_\_\_\_\_

13. \_\_\_\_\_

14. \_\_\_\_\_

15. \_\_\_\_\_

16. \_\_\_\_\_

17. \_\_\_\_\_

18. \_\_\_\_\_

19. \_\_\_\_\_

20. \_\_\_\_\_

21. \_\_\_\_\_

22. \_\_\_\_\_

23. \_\_\_\_\_

24. \_\_\_\_\_

25. \_\_\_\_\_

26. \_\_\_\_\_

27. \_\_\_\_\_

28. \_\_\_\_\_

29. \_\_\_\_\_

30. \_\_\_\_\_

31. \_\_\_\_\_

32. \_\_\_\_\_

(FRONT)

SAN00761766



# Kongeriget Danmark

## PRIORITY DOCUMENT

Patent application No : PA 1998 01501

Date of filing: 17 November 1998

Applicant: Novo Nordisk A/S  
Novo Allé  
DK-2880 Bagsværd

This is to certify the correctness of the following information:

The attached photocopy is a true copy of the following document:

- The specification, claims and drawings as filed with the application on the filing date indicated above.



Patent- og  
Varemærkestyrelsen  
Erhvervsministeriet

TAASTRUP 26 November 1999

  
Karin Schlichting  
Head Clerk

17/11/98

16:29 HEIDEN &amp; HOIBERG + 43588201

NR.023

04

P 227 DK 1

1

The present invention relates to a medication delivery device having a cartridge assembly and a dosing assembly coupled together for delivering selected doses of medication.

5

#### Background

Some medication, such as insulin is self-administered. The typical diabetes patient will require injections of insulin several times during the day. The required insulin dose will vary from patient to patient, and will for each patient often also vary during the day. Each patient will often establish a regimen for the insulin administration adjusted to his or her insulin need as well as lifestyle. Medication delivery pens have been developed to facilitate the self-administration of medication, such as insulin.

10

One prior art medication delivery pen includes a pen body assembly comprising a medication cartridge and a plunger device. A needle assembly may be connected to the pen body assembly. The medication is delivered by moving or pressing a plunger in the direction of the needle assembly thereby delivering the medication. When the medication in the cartridge is exhausted the pen body assembly is discarded. Depending on the medication needs for each individual the medication in the cartridge will last for several days. During this period the needle assembly will often have to be displaced by a new assembly or new needle due to increasing bluntness of the needle making injections painful for the patient.

15

20

Due to the environmental and economical reasons medication delivery pens were developed, for which pens only a part of the pen was discarded after medication exhaustion, such as the cartridge only.

25

An example of prior art pens is disclosed in EP 0 668 571 wherein a medication delivery pen has a reusable pen body assembly and a disposable cartridge assembly that are threadably engageable with one another. The disposable cartridge assembly includes a plunger and can releasably receive a needle cannula assembly through a threaded coupling. A driving means in the pen body assembly engages the plunger after engagement of the pen body assembly and the cartridge assembly, whereby the pen is ready for dosing the medicine within the cartridge. The cartridge

30

35

17-11-98

17/11/98

16:29

HEIDEN &amp; HÖLBERG + 43500001

NR. 023

05

2

holder assembly can be disassembled from the pen body assembly after the medication therein has been exhausted, discarded and replaced.

5 However, a drawback of the above-mentioned pen is that the driving means of the pen body may be disengaged from the plunger of the cartridge during normal use resulting in inaccurate dosing of the medicine.

10 For the device disclosed in EP 0 566 571, the needle assembly will often have to be replaced independently of replacement of the cartridge. When releasing the needle assembly from the cartridge assembly the cartridge assembly may inadvertently be released or partly released from the pen body assembly. Thereby the driving means of the pen body may be disengaged from the plunger of the cartridge. In particular if the pen body assembly is only partly released from the cartridge assembly the user will most probably not be aware of the disengagement but will receive only a portion  
15 or even nothing of the medicine

20 Even pens with differently pitched threaded couplings and/or threaded couplings having different diameters whereby the force exerted to fasten and/or release one coupling is greater than the force necessary for the other coupling present this problem. It is easy to imagine that a small obstruction (a sandstorm, for example) to the smoothest going coupling will necessitate a greater force to fasten/release that coupling which force tends towards the force necessary for the other coupling.

25 Accordingly, it is an object of the present invention to provide a medication delivery device with which the inadvertent disengagement of the driving means and plunger means from the plunger or stopper in the cartridge is avoided.

#### Summary of the invention

30 According to a first aspect of the invention a medication delivery device is provided which comprises

a cartridge assembly, having one end sealed with a pierceable sealing, said end of the cartridge assembly comprising coupling means for releasably mounting a needle

5

17/11/98

16:29

HEIDEN &amp; HOIBERG + 43568001

NR.023

06

3

assembly, and comprising a cartridge having a stopper adapted to receive plunger means.

a dosing assembly comprising plunger means,

5

and optionally a needle assembly,

wherein the cartridge assembly and the dosing assembly are coupled together, and the device further comprises means for securing that the plunger means abuts on the stopper during use of the device.

10

In a preferred embodiment the dosing assembly is reusable and the cartridge assembly is disposable, and accordingly, a second aspect of the present invention is a medication delivery device wherein the dosing assembly is releasably coupled to the cartridge assembly.

15

By the term "use of the device" is meant the normal use, including measuring and delivering the medication, removing a cap from the cartridge assembly and/or needle as well as attaching and releasing the needle assembly. It is understood that the plunger means must disengage the stopper when the cartridge assembly is deliberately released from the dosing assembly because the medication in the cartridge has been exhausted and the cartridge assembly is to be discarded. In this situation the plunger means is to be retracted to the dosing assembly before assembling the device with a new cartridge assembly.

20

25

Securing the abutment of the plunger means on the stopper during use of the medication delivery device, in particular when the needle assembly is coupled to and/or decoupled from the cartridge assembly, may be carried out by a variety of means. In a preferred embodiment the abutment is secured by preventing the cartridge assembly from being inadvertently released from the dosing assembly.

30

Furthermore, it is a preferred aspect of the invention to provide a medication delivery device, which device is arranged for securing that the plunger means abuts on the stopper during coupling and/or decoupling of the needle assembly

35

6

SAN00828641

17/11/98

16:29

HEIDEN &amp; HOIBERG + 43508881

NR. 823

87

4

In one embodiment of the invention the dosing assembly is coupled to the cartridge assembly at the end of the cartridge assembly opposite the means for mounting the needle assembly, and the plunger means is a rod element adapted to exert an axial movement of the stopper towards the sealed end of the cartridge.

5

Accordingly, it is an aspect of the present invention to provide a medication delivery device, wherein the means for coupling the dosing assembly and the cartridge assembly together are such that the coupling and/or decoupling of the needle assembly does not cause an axial movement of the cartridge assembly with respect to the dosing assembly. In this way it is assured that the rod element does not disengage the stopper in the cartridge when the user attaches the needle assembly or removes it after use. Thereby the user can be confident of the accuracy of the dosage selected.

15

The means for coupling the dosing assembly and the cartridge assembly together may be any suitable coupling, preferably a releasable coupling. Examples of the coupling are snap locks, such as snap locks with guidewire and sideways snap locks, snap locks released through threads, bayonet locks, luer locks, hinged locks, threaded locks and any suitable combinations thereof.

20

In particular, when the cartridge assembly is released from the dosing assembly through a movement including an axial movement, such as through a threaded coupling, it is preferred that the means for releasably coupling the needle assembly and the cartridge assembly together are such that the coupling and/or decoupling of the needle assembly cannot cause an axial movement of the cartridge assembly with respect to the dosing assembly. Thus, in that respect examples of the preferred couplings between the needle assembly and the cartridge assembly include releasable snap locks. Another preferred embodiment includes a safety on the coupling between the dosing assembly and the cartridge assembly, such as hinge on the coupling or a threaded coupling releasable only after exerting an axial pressure on the coupling.

25

30

According to the invention preferred combinations of couplings between the dosing assembly and the cartridge assembly and between the needle assembly and the cartridge assembly, respectively, are a threaded coupling combined with a snap

35

7



17/11/98 16:29 HEIDEN &amp; HOIBERG + 43588801

NR. 623 08

5

coupling, a bajonet lock or a luer lock combined with a snap lock, or a snap lock combined with a snap lock, or any other combination for which the couplings are independently working.

5 Another aspect of the present invention is a cartridge assembly for use in the medication delivery device according to the invention. The cartridge assembly comprises a cartridge for the medication to be delivered. The cartridge assembly has one end sealed with a pierceable sealing, said end of the cartridge assembly comprising  
10 coupling means for releasable mounting a needle assembly, and another end comprising coupling means adapted to engage a dosing assembly. Furthermore, the cartridge comprises a stopper.

The cartridge assembly may further comprise a housing for protecting at least a part of the cartridge assembly.

15

In a preferred embodiment at least one of the coupling means of the cartridge assembly is unitarily moulded with the cartridge, and in a more preferred embodiment all the coupling means are unitarily moulded with the cartridge. In the latter case the cartridge assembly may be comprised of just one part, i.e. the cartridge including the  
20 coupling means.

In another embodiment the invention relates to a medication delivery device for transferring medication from the cartridge into a syringe with a needle. In this embodiment the coupling means for engaging the needle assembly may be replaced by  
25 coupling means for engaging the syringe, or coupling means for both may be provided. The coupling means may be a syringe holder, for example a cylinder coupled to the cartridge comprising a central bore for receiving the syringe. The syringe is coupled to the cartridge having the needle piercing the sealing. By activation of the dosing means the metered amount of medication is driven into the syringe. The syringe is then ready for injection after being removed from the cartridge.  
30

#### Drawings

Fig. 1 is an exploded perspective view of the medication delivery device.

35

8

17/11/99

16:29

HEIDEN &amp; HOIBERG - 43560001

NR.023

09

6

Fig. 2 is a cross-sectional view showing part of the medication delivery device, 2a immediately after assembling before the first injection, and 2b after some time of use

- 5 Fig. 3 is a cross-sectional view showing the cartridge before assembling of the medication delivery device.

#### Detailed description of the invention

- 10 A medication delivery device in accordance with the present invention is identified generally by the numeral 20 in Fig. 1 and 2. Medication delivery device 20 includes a dosing assembly 6, and cartridge assembly 1, a needle assembly 16 and a cap 14.

- 15 The dosing assembly 6 is illustrated in Fig. 1 and 2. It is understood, however, that the dosing assembly 6 according to the invention may be any suitable dosing unit including plunger means, and accordingly, that variations from the depicted embodiment may be provided, and are considered to be within the scope of this invention. In the depicted embodiment the dosing assembly 6 includes a cylindrical housing surrounding the plunger means 17 of the dosing unit and having opposed proximal and distal ends
- 20

- In one aspect of the invention the plunger means comprises a rod element 7 which is adapted to engage the stopper 4 of the cartridge assembly 1. The rod element 7 advances axially into the cartridge 5 during injections. The dosing assembly may have any suitable driving means for advancing the rod element 7.
- 25

- The dosing unit 6 preferably also comprises scale means 10 indicating the dosing quantity selected by activating the dose setting means 9 for defining specified selected doses of medication to be delivered. The selected dose may be delivered by actuating the actuator button 18. The actuator button is part of the driving means of the dosing assembly exerting its force on the rod element 7.
- 30

9

SAN00828644

17/11/98

16:29

HEIDEN &amp; HOIBERG 43508801

NR. 023

10

7

The dosing assembly further comprises coupling means 8 adapted for engagement with the cartridge assembly. The coupling means 8 may be internal or external couplings. In a preferred embodiment the coupling 8 is an internal coupling.

5 The cartridge assembly 1 is illustrated in Fig. 1 and 2, and in greater detail in Fig. 3. In Fig. 1 cartridge assembly 1 includes a moulded cartridge 5 extending from proximal end 21 to distal end 22.

10 At the distal end 22 of the cartridge assembly 1 is provided coupling means 2 for releasably mounting a needle assembly 11. At the proximal end 21 of the cartridge assembly 1 is provided coupling means 3 for mounting a dosing assembly 6. The coupling means are as described above.

15 Cartridge 5 also comprises a stopper 4 in sliding fluid tight engagement within said cartridge 5. The stopper 4 is adapted to receive the plunger means, such as a rod element 7 of the dosing assembly 6.

20 The cartridge assembly 1 may further comprise a housing for protecting some or all of the cartridge 5. When the cartridge assembly 1 includes a housing, one or both of the couplings 2, 3 of the cartridge may be moulded unitarily with the housing.

25 In a preferred embodiment at least one of the couplings 2, 3 is moulded unitarily with the cartridge 5, minimising the total number of parts of the device and thereby the production costs.

Instead of the protective housing the cartridge 5 may have integrally moulded reinforcements of the cartridge wall.

30 The depicted cartridge 5 is cylindrical having couplings 2, 3 at opposed ends. However, the cartridge may obtain any suitable form and the cross-section may be circular or non-circular, such as substantially triangular or oval.

35 In Fig. 1 and Fig. 2 the couplings 2, 3 are opposing each other. However, coupling 2 being separate from coupling 3 may be arranged in any angle with respect to coupling 3.

17/11/98

16:29

HEIDEN &amp; HOIBERG - 43566881

NR. 023

11

8

A suitable choice of material allows the cartridge to be at least partly transparent, whereby the user can see whether liquid is left in the cartridge.

5 Referring to Fig. 3 the coupling means of the cartridge are shown in greater detail. The coupling means 3 is an external thread, whereas the coupling means 2 is a recess for a snap lock of the needle assembly. Both coupling means are moulded unitarily with the cartridge.

10 The device according to the invention may include a protective cap 14 that is removably mounted over the cartridge assembly 1 and/or the needle 11 and which is removed before injection of the medication in the cartridge 5. The cap further ensures that the content of the cartridge is protected against sunlight.

15 The various parts of the medication delivery device are advantageously made of plastics, e.g. by injection moulding.

The medication delivery device 20 may further comprise any appropriate needle assembly 11, such as a double ended needle 13 having opposed proximal and distal points and a lumen extending axially therebetween.

25 A mounting hub 12 is engaged on the needle 13 and is removably connected to the coupling means 2 at the needle end of the cartridge assembly. The relative location of the mounting hub 12 ensures that the proximal point of the needle 13 will pierce the sealing when the mounting hub 12 is engaged with the coupling means 2 on the cartridge assembly 1.

The needle assembly 11 may further comprise a removable shield or cap 15 for protecting against accidental needle sticks.

30 The device according to the invention is suitable for delivering pre-set dosages of insulin. It is however understood that the device is suitable for the injection of pre-set dosages of other liquids.

17/11/98 16:29 HEIDEN &amp; HOIBERG - 43500001

NR.023 12

9

In use the user will set the dose by means of the dose setting means 9. Before activating the actuator button 18 the cap 14 must be removed from the cartridge assembly 1 whereby the device 20 is prepared for an injection. The injection is effected by activating the actuator button 18, which again will effect the stopper 4 to be moved towards the needle at the sealed end 22 of the cartridge 5, thereby delivering the desired pre-set dosage. A subsequent dosage of medication will be set in exactly the same manner as described above. However, for such a subsequent dosage, the rod element 7 and the stopper 4 will be in a partly advanced position as starting point. Dose setting and injections can be carried out until all of the medication has been used.

12

SAN00828647

17/11/98

16:29

HEIDEN &amp; HOIBERG + 43508201

NR.023

13

10

Claims:

## 1. A medication delivery device comprising

5 a cartridge assembly, having one end sealed with a pierceable sealing, said end of the cartridge assembly comprising coupling means for releasably mounting a needle assembly, and comprising a cartridge having a stopper adapted to receive plunger means,

10 a dosing assembly comprising plunger means,

and optionally a needle assembly,

15 wherein the cartridge assembly and the dosing assembly are coupled together, and the device further comprises means for securing that the plunger means abuts on the stopper during use of the device.

2. A medication delivery device according to claim 1, wherein the dosing assembly is releasably coupled to the cartridge assembly.

20

3. A medication delivery device according to any of the preceding claims, wherein the device is arranged for securing that the plunger means abuts on the stopper during coupling and/or decoupling of the needle assembly.

25

4. A medication delivery device according to any of the preceding claims, wherein the plunger means comprises a rod element adapted to exert an axial movement of the stopper towards the sealed end of the cartridge.

30

5 A medication delivery device according to any of the preceding claims, wherein the means for releasably coupling the dosing assembly and the cartridge assembly together are such that the coupling and/or decoupling of the needle assembly does not cause an axial movement of the cartridge assembly with respect to the dosing assembly.

35

13

SAN00828648

17/11/98

16:29

HEIDEN &amp; HOIBERG - 43588801

NR. 823

14

11

6. A medication delivery device according to any of the preceding claims, wherein the dosing assembly is released from the cartridge assembly through a movement including an axial movement
- 5 7. A medication delivery device according to claim 6, wherein the dosing assembly is released from the cartridge assembly through a threaded coupling.
8. A medication delivery device according to any of the preceding claims, wherein the dosing assembly comprises scale means.
- 10 9. A medication delivery device according to any of the preceding claims, wherein the dosing assembly comprises dose setting means for defining specified selected doses of medication to be delivered.
- 15 10. A medication delivery device according to any of the preceding claims, wherein the cartridge assembly comprises a housing
11. A medication delivery device according to any of the preceding claims, wherein the cartridge is unitarily moulded with at least one coupling means.
- 20 12. A medication delivery device according to any of the preceding claims, further comprising a cap for protecting the needle assembly and/or the cartridge assembly.
- 25 13. A cartridge assembly for use in the medication delivery device as claimed in any of claims 1-12, having one end sealed with a pierceable sealing, said end of the cartridge assembly comprising coupling means for engaging a needle assembly, and another end comprising coupling means adapted to engage a dosing assembly, further comprising a cartridge said cartridge comprising a slidable stopper.
- 30 14. A cartridge assembly according to claim 13, further comprising a housing.
- 35 15. A cartridge assembly according to claim 13 or 14, wherein the cartridge is unitarily moulded with at least one coupling means

14

SAN00828649

17/11/98

16:29

HEIDEN & HOLTBERG + 43508001

NR.023

15

12

5 16 A cartridge assembly according to any of claims 13-15, wherein the coupling means adapted to engage the dosing unit is such that coupling and/or decoupling of the needle assembly does not cause an axial movement of the cartridge assembly with respect to the dosing assembly.

10 17 A cartridge assembly according to any of claims 13-16, wherein the dosing assembly is released from the cartridge assembly through a movement including an axial movement.

18 A cartridge assembly according to claim 17, wherein the dosing assembly is released from the cartridge assembly through a threaded coupling.

15

15

SAN00828650



17/11/98

16:29

HEIDEN & HOFBERG + 43588001

NR. 023

16

1/2

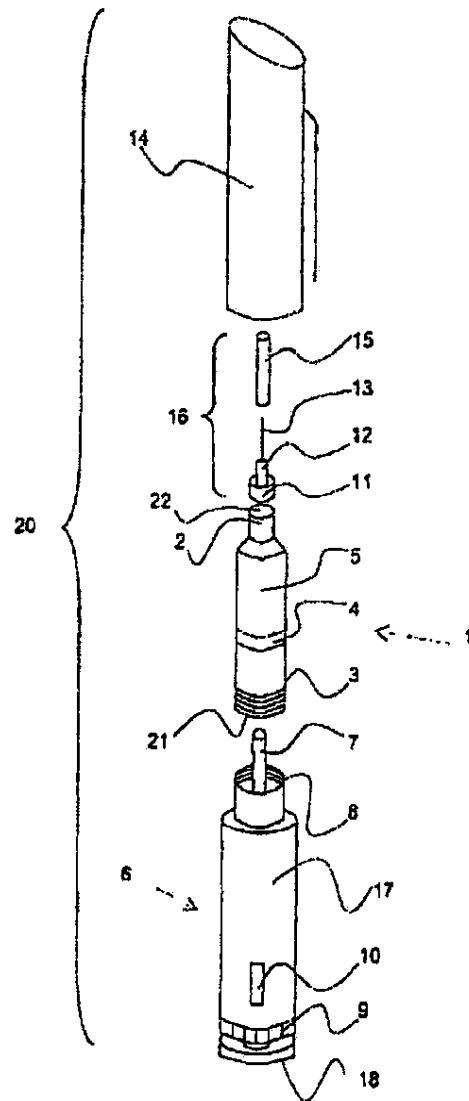


Fig. 1

17/11/98

16:29

HEIDEN & WOIBERG - 43588001

NR.023

17

2/2

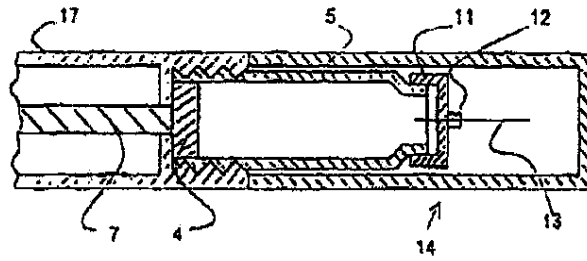


Fig. 2 a

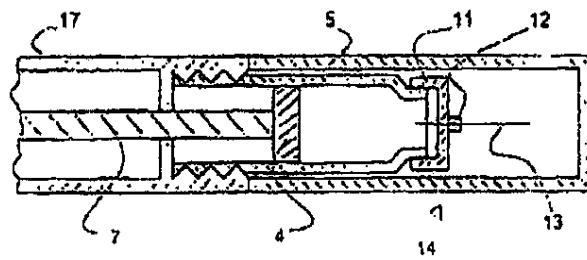


Fig. 2 b

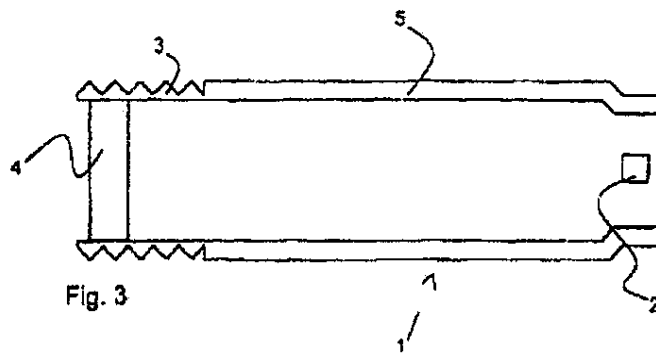


Fig. 3